

COOLFIRE

ULTRA



CoolFire ULTRA

Temperature Control Vaping System

Welcome to the next level of vaping power and precision with this Innokin CoolFire ULTRA Vaporizer; powered by AETHON Temperature Control Technology. For the best possible vaping experience please read, and follow, this user manual.

The CoolFire ULTRA is powered by the Ultra-fast advanced AETHON chipset for 150 Watts of pure power. Choose your favorite Temperature control coils, or vape Wattage mode, and get ready for an amazing vaping experience with no more dry hits! Pure Power, Total Control, Huge Clouds.

Get ready to experience vaping excellence with the Innokin CoolFire ULTRA!!

Verify your CoolFire ULTRA is an authentic Innokin Technology vaporizer:

- 1) Locate the label on the packaging and scratch the silver to reveal your CoolFire ULTRA Unique Authorization number.
- 2) Visit: <http://www.innokin.com/verify-device/>
- 3) Enter the Unique Authentication number in the Authentication field.
- 4) Verify your CoolFire ULTRA is a genuine Innokin Vaporizer.

If you have any questions or suggestions, please write to us at support@innokin.com.

Join our social media channels for the latest Innokin information and contests!

Innokin Facebook Page:

<https://www.facebook.com/innokin.Technology>

Innokin Instagram:

<https://www.instagram.com/innokintechnology>

Innokin Subreddit:

<https://www.reddit.com/r/innokin>

Innokin Twitter:

<https://www.twitter.com/innokintech>

WARRANTY INFORMATION:

Innokin Technology provides a 90 day after sales service warranty to all authorized vendors. Please consult the official Innokin website (www.innokin.com) or your Authorized Innokin Technology Vendor for more information and terms of service.

The proof of purchase is needed for the 90 Day Limited Warranty.

For more information and to download the warranty card please visit:

<http://www.innokin.com/innokin-90-day-lim-td-warranty-program/>

SAFETY GUIDELINES AND WARNING:

Please read this section carefully to ensure you receive maximum benefits from your product and enjoy vaping with it in the most safe and effective ways possible.

1. This product may be used with e-liquids that contain nicotine. If questions or concerns regarding your e-liquid arise, please check with your e-liquid provider. This product is only intended for use by adults of legal smoking age (18+) and should not be used by children, women who are pregnant or breastfeeding, or persons with or at risk of heart disease, high blood pressure, diabetes or taking medicine for depression or asthma, or who otherwise may be sensitive to nicotine. Nicotine is addictive and habit forming, and can be toxic by inhalation, in contact with the skin or eyes, or if swallowed. Ingestion of the non-vaporized concentrated e-liquid ingredients can be poisonous. Keep away from children and pets.
2. This product may be used with e-liquids that contain nicotine, a chemical known to the State of California to cause birth defects or other reproductive harm.


3. This product is only designed to be used with high quality e-liquid. Please check with your e-liquid provider. This device is not intended for use with loose tobacco leaf or herbal substances.
4. This product has not been evaluated by the Food and Drug Administration and is not intended to treat, mitigate, prevent or cure any disease or condition. This product is not intended for use as a smoking cessation device.
5. The atomizer/tank must be stored out of the reach of children and pets. All empty atomizers must also be disposed of properly and out the reach of children and pets.
6. This product includes small parts such as the mouth piece. Always keep any small parts out of reach of children and pets to prevent swallowing or other harm.
7. Do not misuse, mishandle or store your product improperly. Even though it is made of high quality stainless steel it may become damaged when dropped or otherwise mishandled.
8. Do not attempt to repair the unit by yourself as damage or personal injury may occur.
9. In order to guarantee the normal functioning of your product, and maximize your vaping

10. In order to prolong the operation of your product, please do not place or store this product in excessively hot or cold environments.
11. Obey local laws or regulations regarding Electronic Cigarettes when vaping. If you are in an area where there are any bans or potential dangers, please do not use your product.
12. Your product is not waterproof. Keep it dry at all times.
13. Do not allow any liquids or ejuice to enter the device through the top threading or the USB ports. If any liquids enter the device, or come into contact with the PCB, please discontinue using or charging the device and contact your local Authorized Innokin Vendor immediately.
14. Keep your product away from sources of excessive heat as damages may occur.

15. Do not drop, throw, or mishandle your product as the outer shell or inner components may become damaged.
16. Innokin is not responsible for any atomizer or battery damage due to the use of low quality eLiquid, dry herb, or other materials for which the product was not designed.
17. Innokin is not responsible for battery and charger explosions, or malfunctions, due to the use of a low-quality charger. Only use the original product starter kit micro USB cable to charge the device.

We recommend that you use a high quality 5V 2A USB wall charger (CE/UL Certified)

18. The product is not designed for use with a car charger, the product does not come included with a car charger.

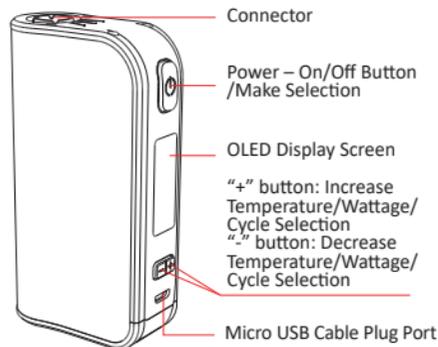

OPERATION GUIDE:

The CoolFire ULTRA has three buttons: “⏻” Power button, “+” button and “-” button.

“⏻” Button: Power - On/Off Button/Make Selection

“+” Button: Increase Temperature / Wattage / Cycle Selection

“-” Button: Decrease Temperature / Wattage / Cycle Selection

The large OLED screen displays all important information.

To POWER ON the CoolFire ULTRA:



ON/OFF Power Button:

Click the power button “⏻” three times quickly to power on the CoolFire ULTRA.

The main LED light will blink from red to yellow to green, after which the CoolFire ULTRA will enter standby mode. The final color of the LED will indicate the current battery power level.

The CoolFire ULTRA battery capacity is displayed via green, yellow and red LED

Green = Almost fully Charged.

Yellow = Half Power.

Red = Low Power.

Charge the CoolFire ULTRA.



When the CoolFire ULTRA has been powered on Hold the “⏻” button down to activate the unit.

The color of the LED when the button is pressed indicates the current power level.

When the CoolFire ULTRA is fully recharged the LED light will power off.

5V/2A Fast Charging Supported with high quality, certified CE/UL/FCC wall charger.

To POWER OFF the CoolFire ULTRA:

When the CoolFire ULTRA is not in use, click the power button “⏻” three times to power off the CoolFire ULTRA.

IMPORTANT: Always power off the CoolFire ULTRA when it is not being used, or when it is going to be stored in a pocket, bag or purse.

‘Vape while charging’ Technology:

The CoolFire ULTRA is recharged with a Micro USB cable. When plugged into a suitable power source the CoolFire ULTRA can be vaped and charged at the same time with Innokin Technology’s ‘Vape while charging’ pass-through technology.

IMPORTANT BATTERY CARE:

A battery should never be totally discharged for a period of time however, if the battery is totally discharged it must be recharged to at least 1 bar before vaping with ‘Vape while charging’ pass-through technology. Ensure the OLED battery power level has at least 1 bar remaining before using the ‘vape while charging’ function.

READY TO VAPE!

Check that the CoolFire ULTRA battery is charged and functioning properly.

Attach an atomizer. Ensure that the atomizer is filled with eliquid and attached correctly. There must be eliquid in the tank before you power on & activate the device. Do not dry burn the coil. Always prime new coils before vaping. Always check & confirm the material and range of the attached coil.

Power on the CoolFire ULTRA by pressing the “⏻” Power button 3x.

The screen will display the last selected settings.

Click the “⏻” Power button once to bring up the Coil Selection screen:

COIL MODE SELECTION SCREEN

<SAME> - Same coil with previous settings

<Ni> - Ni200 - Nickel Coil

<Ti> - Titanium

<SS> - Stainless Steel 316L

<W> - Wattage

SAME COIL 0.21Ω
SAME NiTiSSW

Cycle through the coil selections with the “+” or “-” buttons.

Press the power button “⏻” to select the correct coil type.

The CoolFire ULTRA will only use Temperature Control with Ni200, Titanium, Stainless Steel 316 coils or use Wattage; it will not fire both. You must choose either Temperature Control or Variable Wattage.

IMPORTANT:

You must select the correct coil type. Set the CoolFire ULTRA temperature or wattage according to the attached coil's recommended range.

Do not set the temperature higher than recommended or you may damage the coil. If the coil is damaged, or tastes burnt, replace the coil immediately.

The ideal temperature or wattage varies according to coil, eliquid, tank airflow and personal preference. Start at the low end of the recommended coil temperature or wattage range and increase the set temperature or wattage until you find your perfect vape temperature and flavor.

You must select the correct coil mode before vaping.

CALIBRATION AND COIL SELECTION

IMPORTANT:

For accurate calibration the coil must be at room temperature. If a coil has been heated then it must be cooled down to room temperature before calibration. Eliquids should be room temperature for accurate calibration, if an eliquid is cold then it must be warmed to room temperature before calibration.

There are two ways to select the correct coil mode:

CALIBRATION & Coil Selection Method #1:

Attach a new tank or Detach and re-attach a tank. When the “⏻” power button is pressed the OLED screen will display:

SAME COIL 0.21Ω
SAME NiTiSSW

Press the “+” or “-” button to cycle coil types through Ni(Ni200), Ti(Titanium), SS(Stainless Steel), W(Wattage Mode).

When the desired mode is selected press the button “⏻” to select Coil Type and activate the CoolFire ULTRA.

Coil Selection Method #2:

Press and hold the power button “⏻” and the “+” button together for 3 seconds; continue holding the buttons to cycle through coil types: Ni(Ni200), Ti(Titanium), SS(Stainless Steel), W(Wattage Mode). The top left corner will display the coil type. Release the buttons to select the correct coil type.

To adjust the set temperature and switch between Fahrenheit °F and Celsius °C:

Celsius Temperature Range can be adjusted from between 150-315°C in 5°C increments. Hold the “+” or “-” button and the temperature setting will flash. Release the button and press it again to quickly increase or decrease the set Celsius Temperature.

When the °C temperature is cycled above 315°C, or below 150°C then the device will switch to °F temperature mode.

Press the “⏻” button to lock the set temperature and activate the CoolFire ULTRA.



The Fahrenheit Temperature Range can be adjusted from 300-600°F in 5°F increments. Hold the “+” or “-” button and the temperature setting will flash. Release the button and press it again to quickly increase or decrease the set Fahrenheit temperature.

When the °F setting is increased above 600°F decreased below 300°F the device will switch to °C mode.

Press the “⏻” button to lock the set temperature and activate the CoolFire ULTRA.

Dry Hit Detection & Prevention:

If there is insufficient eliquid in the coil, or if the coil is not primed, the CoolFire ULTRA output will drop to a low wattage temperature maintenance mode.

THIS IS VERY IMPORTANT. YOU MUST READ THIS BEFORE VAPING.

Temperature Control Functions are only available with T.C. compatible coils.

Ni Mode: Nickel (Ni200) coils only!

You MUST choose the Ni mode when using a Ni200 coil in the tank.

Some individuals may be allergic to Nickel (Ni200); ensure that you are able to vape.

Nickel (Ni200) before using Ni200 coils.

If you feel unwell after vaping, seek full medical advice immediately.

Ti Mode: Titanium coils only.

You MUST choose the Ti mode when using a Titanium coil in the tank.

Stainless Steel TC mode:

SS 316L coils are recommended.

You MUST choose the SS mode when using a Stainless Steel 316L coil in the tank.

W Mode: Non Temperature Control coils.

Adjust Variable Wattage:

When the CoolFire ULTRA is in variable wattage mode press and hold the “+” or “-” button and the set wattage will flash. Release the button and press the “+” or “-” button again to increase or decrease the wattage.

The CoolFire ULTRA wattage can be adjusted from 6.0 to 150 watts in .5 watt increments (between 6W-100W) and in 1.0 watt increments (between 100W-150W) by pressing and holding the “+” or “-” button. Hold the button down to quickly increase or decrease the set wattage.

If the wattage is decreased below 6 Watts it will cycle up to 150 Watts. If the wattage is increased above 150 Watts it will cycle down to 6 watts. Press the button “⏻” to lock the set wattage and activate the CoolFire ULTRA.

14



PreBoost Ramp-Up Technology:

What it does:

Select the wattage the AETHON chip will use to heat the coil to the target temperature. Press and hold the “⏻” power button and “-” button for 3 seconds to enter PreBoost RampUp Wattage selection mode. The PreBoost RampUp setting in the lower left corner will flash. Press the “+” or “-” buttons to cycle from 25-150W and press the “⏻” button to set the RampUp wattage.

Flavor and vapor production will change depending on your selection; this allows you to tailor your vaping experience even further than just wattage or temperature. The optimal RampUp wattage setting will vary according to the type of coil and tank that you are using. Experience more flavors and better vapor from your favorite e liquids!

Ohms Meter, Battery Level Indicator & Puff Counter:

With an atomizer attached, hold both the “+” and “-” buttons simultaneously and the secondary screen will display the precise resistance of the attached atomizer, the battery voltage and the number of puffs since the device was last turned off.

0.20200Ω
3.93V

150

15



INTEGRATED SAFETY:

15 second cutoff:

If the “⏻” button is held for 15 seconds or longer the CoolFire ULTRA Advanced Personal Vaporizer LED will flash 10 times and then stop firing until the “⏻” button is released and pressed again.

0.50Ω
0.00V -.W 10.05

Low Voltage Warning:

The Red LED and Battery bar will blink 8 times when the battery capacity is lower than 6.6V and the CoolFire ULTRA will automatically power off. Recharge the device immediately to maintain battery health.

0.20Ω
0.00V 15.0W

Short Circuit/Atomizer Protection:

Short Circuit/Atomizer Protection protects the CoolFire ULTRA Advanced Personal Vaporizer against shorted atomizers and will stop the unit from functioning in unsafe conditions.

The CoolFire ULTRA features automatic real-time atomizer Ohms detection. If the resistance of the atomizer is lower than 0.07Ω, the LED will light solidly for 5 seconds, the Ohms bar will blink and the CoolFire ULTRA will not power on.

Check Atomizer:

If there is no atomizer attached, or the atomizer is not connected properly, or resistance is 3.5 Ohm or above, the OLED screen will display: “CHECK ATOMIZER”.

-.Ω
0.00V 15.0W

CHECK
ATOMIZER

Over-Discharge Protection:

The CoolFire ULTRA Advanced Personal Vaporizer monitors battery voltage and will automatically power off if the battery is over-discharged.

Overheat Protection:

The CoolFire ULTRA features automatic real-time PCB Chipset temperature detection. The screen will display “TOO HOT” if the PCB is overheated.

TOO HOT

OLED SCREEN ORIENTATION:

Hold “+” and “-” button for 3 seconds to flip the horizontal orientation of the OLED screen.

Remember last Temperature or Wattage setting:

When the CoolFire ULTRA is turned off it will remember the current temperature or wattage setting and it will retain the setting when the CoolFire ULTRA is powered back on.

How to charge the CoolFire ULTRA

To charge your CoolFire ULTRA connect your micro USB charging cable to the charging port of your device. Connect the other end of the micro USB charging cable to the USB port of a computer or a wall charger.



IMPORTANT Charging Information:

Never charge a battery that has been damaged or dropped.

Never plug a charger into a non-approved mains power transformer.

Do not overcharge. Remove the battery from the charger when charging is complete.

Never leave a charging battery unattended.

Only use the included high quality charging cable.


Wall Adapters should be CE/UL/FCC certified, high quality and authentic. Do not charge your vaporizer with your car.

If traveling by airplane, do not pack your device into your check in baggage. Speak with your airline about e-cigarette/vaporizer transport guidelines.

If there are any issues with the device please contact your Authorized Innokin vendor immediately.

How to refill the SCION Tank (NOT INCLUDED IN EXPRESS KIT)

- 1) Twist the top cap off.
- 2) Carefully add e-liquid into the filling hole. Take care not to get e-liquid into the central air hole.
- 3) To avoid any leakage, do not overfill.
- 4) Twist the top cap on securely.



IMPORTANT:

Add e-liquid using a refill container with a nozzle's width less than 3 millimetres. Prime the new coil by adding 3 - 5 drops of eLiquid into the center screen. Wait **2** minutes before vaping.



WHEN IS IT TIME TO CHANGE THE CLEAROMIZER COIL?

All coils will need to be replaced after a certain amount of use. The time between coil replacements will vary according to the eLiquid used and personal vaping habits.

You will know when the atomizer coil should be replaced when you begin experiencing less performance and taste from your clearomizer. When a new clearomizer coil is used, large vapor clouds and robust flavors will be produced from your e-liquid. The first sign that your coil needs to be replaced is that there will be less vapor production. The second indication that the atomizer coil needs to be replaced is that flavors will become less tasty, and may begin to have a burnt taste. This burnt taste will become more and more apparent as the coil continues to wear out. We recommend that you change the coil at the very first sign of burnt taste and decreased clouds.

How to replace a coil for the SCION Tank:

- 1) Carefully unscrew the tank base from the tank body.
- 2) Hold and unscrew the coil from the tank base.
- 3) Screw a new coil into the tank base.
- 4) Prime new coil with e-liquid when mounted.
- 5) Carefully screw the tank base back to the tank body.



CAUTION: Make sure there is no e-liquid in the tank before replacing a coil.

Important:

Always take care when handling e-liquid. Always wash your hands after handling e-juice or used coils. In case of e-liquid contact with eyes, rinse immediately with cold water and seek medical advice right away. Dispose of used coils safely and keep used coils and e-liquid away from children and pets.

Operating Temperature Range:

150-315 °C 5°C increments

300-600 °F 5°F increments

Operating Wattage Range: 6.0 - 150W

.5 watt increments (6W-100W)

1.0 watt increments (100W-150W)

Precision Temperature Control

Direct Current – Steady Power Output

Balanced Even Coil Heat-Up

Ultra-low External Heat Generation

Dry Hit Detection & Prevention

Ultra Low Standby Power Consumption

Technical Specifications

Battery: 4000mAh

Standby current: 200uA max

Maximum output Wattage: 150W

Maximum output Current: 36A

Maximum working Current: 30A

Maximum output Voltage: 7.5V

Atomizer Resistance: 0.1 Ω (Minimum)

Temperature Control Mode: Ni (0.1-1.0 Ω),

Ti (0.1-0.5 Ω), SS 316L (0.2-0.5 Ω) coils are recommended.

Important:

**Temperature Control is only available with
T.C. compatible coils.**